
## Fact sheet **ECO-Jack** EJ230-3XR **XR-Series**




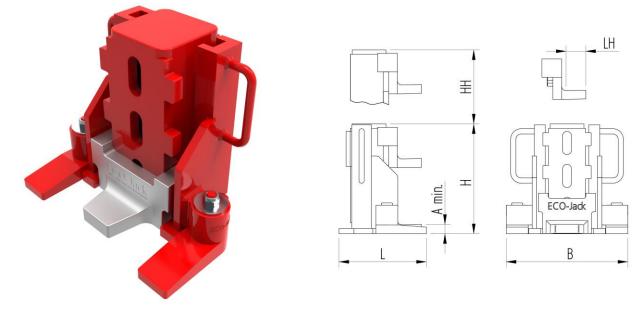


## **Specification:**


Heavy-duty hydraulic jacks of the ECO-Jack XR series do, compared with the ECO-Jack S-series, require an external 700 bar pump for operation. This facilitates and accelerates working in confined conditions and when using several jacks at the time. The compact design without a pump leads to a weight reduction of up to 30% and allows for easy handling for optimal use under extreme conditions. External pumps allow simultaneous operation on several ECO-Jack XR series machine jacks by one person. The ECO-Jack XR series has an integrated spring return system, which always returns the machine lifter automatically to the starting position.

## Technical data of hydraulic jacks:

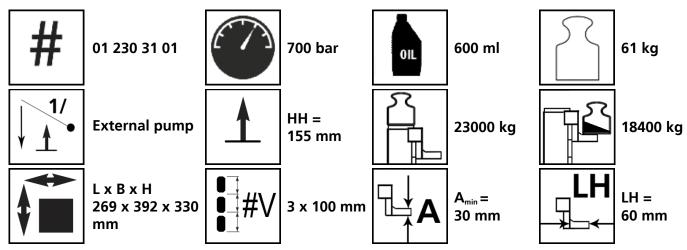

## Please always observe the operating instructions, their safety instructions and local conditions!





rating pressure	OI
ng load with I in kg	FH

