
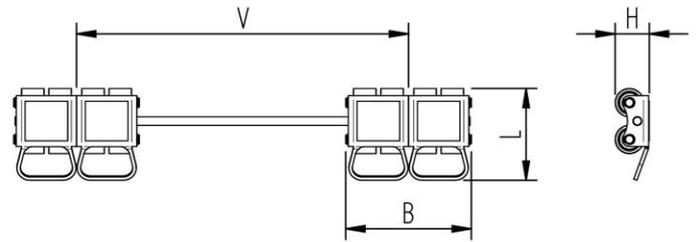


Fact sheet **ECO-Skate** MINI50S

Load moving system, rear, 3-/4- load points

HTS

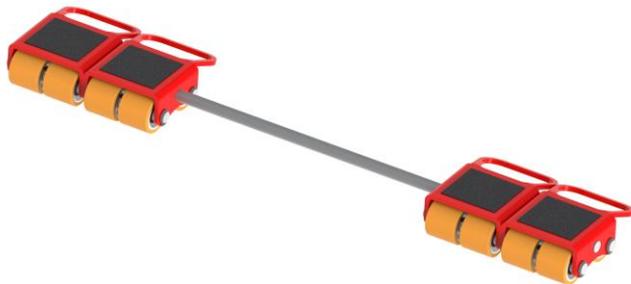

Specification:

Heavy-duty load moving system for the professional indoor heavy load transport on clean, smooth and level floors, incl. alignment bars, anti-slip rubber pad and high-quality HTS 3-component polyurethane wheels, which are abrasion-resistant, non-marking and cut-resistant as well as suitable for all smooth and level floors with slight unevenness. In combination with a L or ROTO skate with the same installation height it forms a safe overall system with 3 load points. For two ROTO skates, observe the operating instructions for 4-point supports.

Technical data of load moving system:

# 10 050 07 20	70 x 150 mm	$5,5 \times 37 = 204 \text{ mm}^2$ ▼ 15,0 MPa
MAT PU, ST, 93 Shore A	L x B x H 162 x 221 x 60 mm	32,7 cm ²
2 x 2500 daN	V = 221 - 584 mm	250 daN*
# 2 x 8	10 kg	150 daN*

Equipped with the following wheel:

# 11 050 01 42	$5,5 \times 37 = 204 \text{ mm}^2$ ▼ 15,0 MPa
MAT PU, ST, 93 Shore A	312,5 daN
Ø50x46 - Ø15 mm	$V_{\text{max}} = 2 \text{ km/h}$



Please always observe the operating instructions, their safety instructions and local conditions!

# Part No.	# Number of wheels	Load Area in mm	Area mm ² of the roller surface pressure ▼ N / mm ²	Traction* in daN, required force to move the load at a steady speed of 2 km/h under ideal conditions
MAT Wheel material layer, core: AL Aluminium, NY Nylon PU Polyurethane, ST Steel	Dimensions of wheel, inside ball bearing diameter mm	Dimensions in mm L x B x H	Loaded area per skate in cm ²	
Carrying Capacity of load moving skate in daN at 2km/h max.	Weight kg	Steering bar length D for L, adjustability V for S and DUO skate systems	Starting resistance* in daN, required force to start moving, under ideal conditions	* Varies depending on the tolerances of the floor and ambient situation. All information without guarantee.